
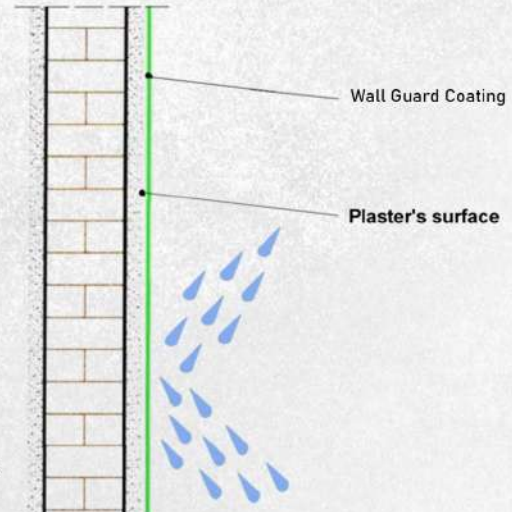


Wall Guard

Interior / Exterior Elastomeric Coating

Wall Guard is a special acrylic resin based, single part flexible, thixotropic waterproof cum decorative coating. It is economical and ideal for use in vertical/ horizontal surfaces. Suitable for painting external wall as it offers both water proofing and decoration. Can also be used as a base & intermediate coat in brick bat coba or IPS flooring.

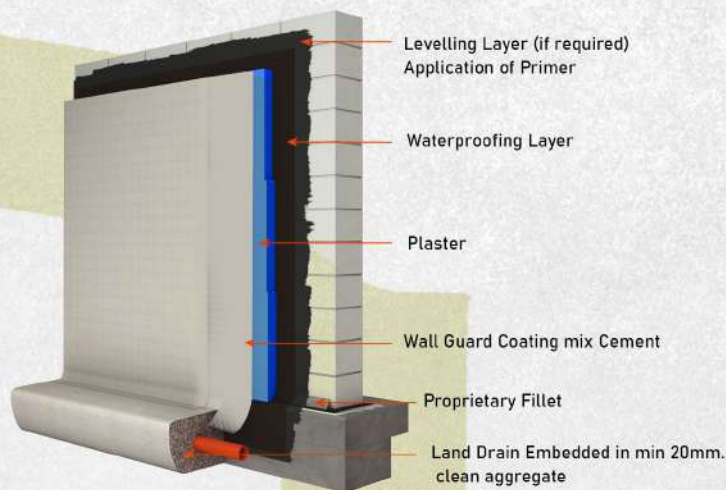

Better dampness prevention



Safe for drinking water



Helps Protect structural strength



Higher durability of home



Quick application

Physical Properties

• Colour	: White
• Total Solids	: 47%
• Form	: Single component
• Specific Gravity	: 1.25
• Tensile Strength	: >2.5N / mm ²
• Elongation at Break	: >250%
• Adhesion Strength (concrete)	: >1.0N / mm ²
• Touch Dry	: After 4hour
• Cure Time	: 24 hours approx.
• Crack Bridging	: >0.5 mm
• Brookfield Viscosity (mPa.s)	: >8000(#10rpm)

